



Mains-Fed Water Cooler
Countertop / Freestanding

C2 Firewall®

Bottle-free water dispenser
with excellent purifying performance,
easy operation and stylish design

- Perfect solution for any small or medium size workplace looking for great tasting purified water, reliability and guaranteed quality.
- Firewall® safely purifies water up to 99.9999% bacteria-free and 99.99% virus-free.
- Practical water dispenser offering two water options.



Product features and benefits



Efficient and sustainable technology

The product line uses R600a, a naturally occurring refrigerant gas that does not contribute to global warming, in addition to offering greater energy efficiency with the use of a quieter compressor.

Standby mode significantly reduces power consumption when the unit is not in use.

The enclosed dispense alcove protects the user from splashing when dispensing water, and it is perfectly shaped to accommodate re-usable water bottles.



Best hygiene features

The key plastic surfaces surrounding the dispensing area are infused with BioCote®, a silver ion additive that provides continuous antimicrobial protection against a broad spectrum of bacteria, mould and fungi, and reduces the risks of cross-contamination.

Patented Firewall® UV-C purification technology guarantees microbiologically safe water by deactivating up to 99.9999% bacteria, 99.99% viruses, and 99.9% cysts.

Touch-free dispensing enabled by the add-on infrared (IR) module for greater hygiene and piece of mind (optional).

1.8
L/M

FLOW RATE



Versatile and compact design

The C2 Firewall® features sleek lines and a streamlined design with silver accent trims, seamlessly complementing any workplace interior.

Its simple and intuitive dispensing controls allows to easily choose between cold/hot or cold/ambient water at a simple press of a button.

The 230 mm dispensing height is suitable to accommodate average size reusable bottles.

Available in a countertop format for placement on worktops and as a freestanding unit for customers who prefer floor installations.


The floorstanding model comes in a standard height (571 mm) or with a taller base cabinet (723 mm) in case of specific market's request.

99.9999%

Firewall® UV-C purification technology thoroughly purifies the water all the way through to the point of dispense.



Technical specifications

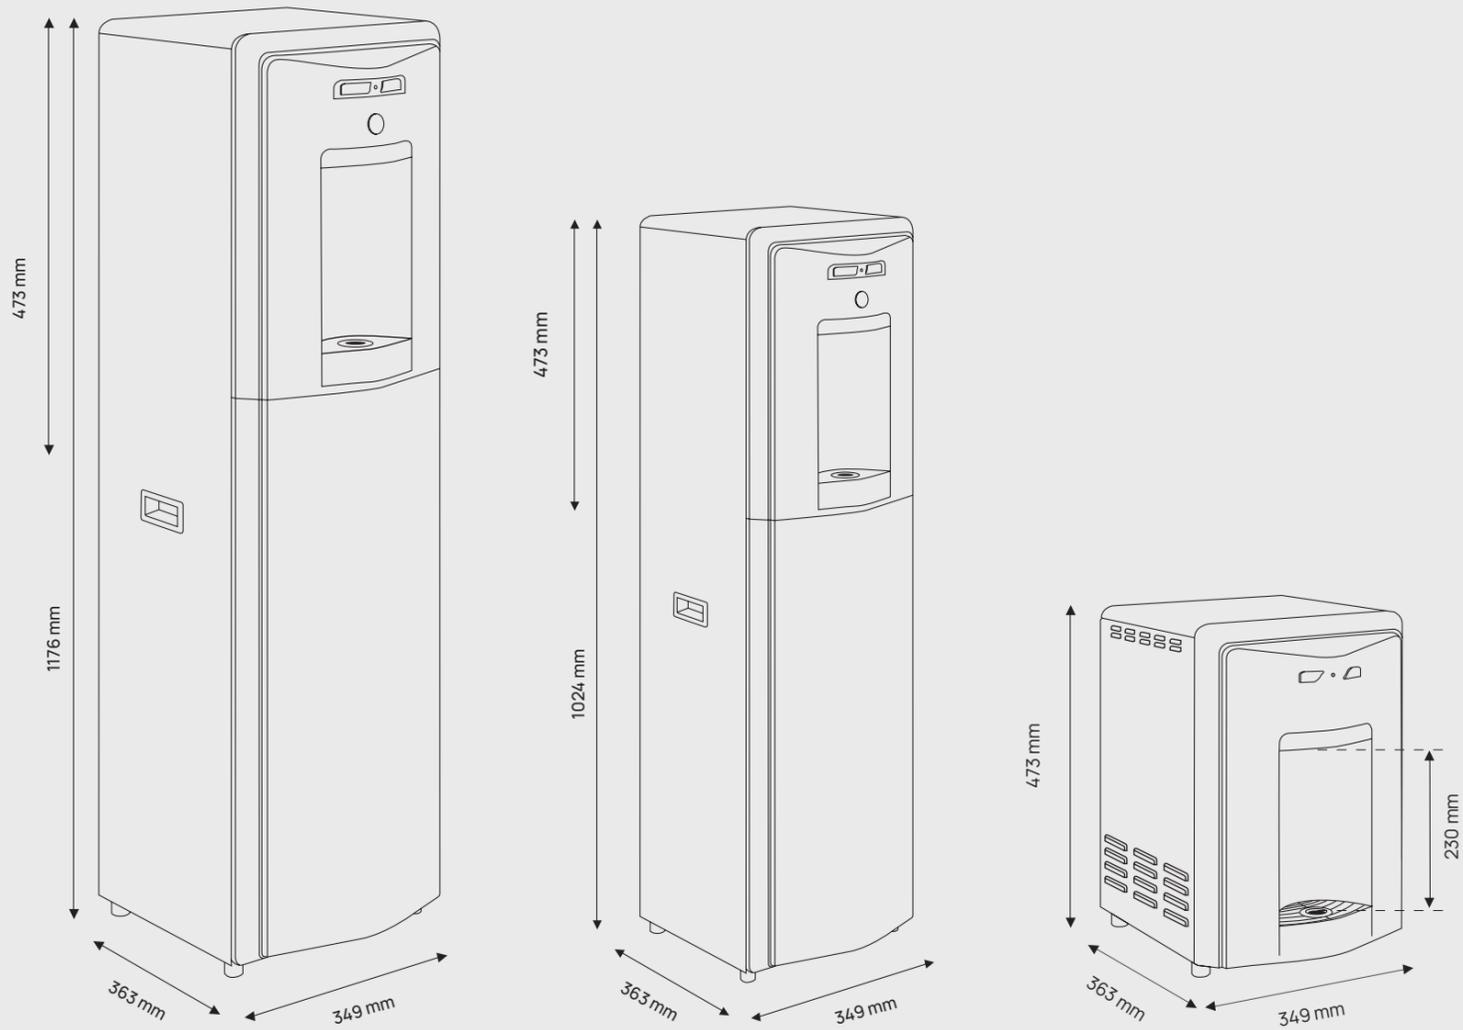

Water options

Ambient	Cold	Hot
	✱	☺
💧	✱	

Specifications

Model	Countertop	Freestanding
Dimensions	349mm (W) x 363mm (D) x 473mm (H)	349mm (W) x 363mm (D) x 1024mm (H) 349mm (W) x 363mm (D) x 1176mm (H) [tall]
Weight	20 Kg (net) - 24 Kg (gross)	27 Kg (net) - 29 Kg (gross)
Dispense (area) height	230 mm	
Drip tray capacity	360 ml	

Technology and performance

Water purification system	Firewall® UVC technology	
Recommended filtration	Carbon Block (external installation, not included with the product)	
Refrigerant gas	R600a	
Cooling technology	Cold tank	
Tank	Hot water: 1.5 L / Cold water: 2 L	Hot water: 1.5 L / Cold water: 4 L
Dispensing capacity (flow rate)	1.8 L/m	
Min/max water temperature	Cold: 3° - 5° - 7°C (default 5°C) / Hot: 85 - 87°C (default 85°C)	
Noise level	35db	
Operating pressure	3 bar	
Max electrical consumption	930 W H/C / 130 W C/A	

Installations requirements

Power supply	230 V - 50 Hz
Compressor power	1/8 HP
Water connection	1/4"
Ventilation space	10 cm

CulliganTM
Water you love.

culligan.com
+1111 222 2222
email@culligan.com

